

Sikaplan® WP 1100-15 HL

DECLARATION OF PERFORMANCE

No. 21236317

1	UNIQUE IDENTIFICATION CODE OF THE PRODUCT-TYPE:	21236317
2	INTENDED USE/S	EN 13491:2004/A1:2006 Polymeric geosynthetic barrier for use as a fluid barrier in the construction of tunnels and underground structures
3	MANUFACTURER:	Sika Services AG Tüffenwies 16-22 8064 Zürich
4	AUTHORISED REPRESENTATIVE:	
5	SYSTEM/S OF AVCP:	System 2+
6a	HARMONIZED STANDARD:	EN 13491:2004/A1:2006
	Notified body/ies:	1213

Declaration of Performance

Sikaplan® WP 1100-15 HL

21236317

2017.09, ver. 1

1003

7 DECLARED PERFORMANCE/S

Essential Characteristics	Performance	AVCP	Harmonized Technical Specification
Tensile strength, machine direction	17.0 (± 2.0) N/mm ²	System 2+	EN 13491:2004/ A1:2006
Tensile strength, cross machine direction	16.0 (± 2.0) N/mm ²	System 2+	
Resistance to static puncture	1.75 (± 0.25) kN	System 2+	
Water permeability (liquid tightness)	$< 10^{-7} \text{ m}^3 \times \text{m}^{-2} \times \text{d}^{-1}$	System 2+	
Durability weathering	NPD	System 2+	
Durability oxidation	Change of tensile strength and elongation: $\leq 10\%$	System 2+	
Durability environmental stress cracking	NPD	System 2+	
Dangerous substances	NPD	System 2+	



8 APPROPRIATE TECHNICAL DOCUMENTATION AND/OR - SPECIFIC TECHNICAL DOCUMENTATION

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Name: Stamatis Antonakos
Function: TMM Waterproofing & Roofing
At Athens on 26 November 2018

Name: Alexandros Melissourgos
Function: Technical manager
At Athens on 26 November 2018

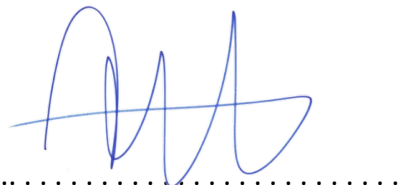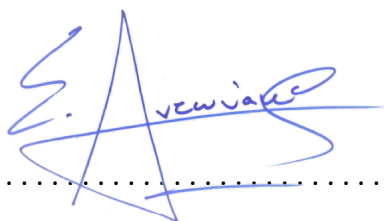

End of information as required by Regulation (EU) No 305/2011

Declaration of Performance

Sikaplan® WP 1100-15 HL
21236317
2017.09, ver. 1
1003



04

Sika Services AG, Zurich, Switzerland

DoP No. 21236317

EN 13491:2004/A1:2006

Notified Body 1213

Polymeric geosynthetic barrier for use as a fluid barrier in the construction of tunnels and underground structures

Tensile strength, machine direction	17.0 (± 2.0) N/mm ²
Tensile strength, cross machine direction	16.0 (± 2.0) N/mm ²
Resistance to static puncture	1.75 (± 0.25) kN
Water permeability (liquid tightness)	$< 10^{-7}$ m ³ x m ⁻² x d ⁻¹
Durability oxidation	Change of tensile strength and elongation: $\leq 10\%$

<http://dop.sika.com>

ECOLOGY, HEALTH AND SAFETY INFORMATION (REACH) REGULATION (EC) NO 1907/2006 - REACH

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances, which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in this product data sheet. Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0.1% (w/w).

LEGAL NOTE

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the products suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Declaration of Performance

Sikaplan® WP 1100-15 HL
21236317
2017.09, ver. 1
1003



Sika Hellas ABEE
Protomagias 15
14568 Kryoneri
Attica - Greece
www.sika.gr

Declaration of Performance
Sikaplan® WP 1100-15 HL
21236317
2017.09 , ver. 1
1003