

SikaFill®-100

DECLARATION OF PERFORMANCE

No. 33438794

1	UNIQUE IDENTIFICATION CODE OF PRODUCT-TYPE:	33438794
2	INTENDED USE/S	ETAG 005-8:2000 Liquid-applied roof waterproofing kit based on polymers in water dispersion
3	MANUFACTURER:	Sika Services AG Tüffenwies 16 8048 Zürich www.sika.com
4	AUTHORISED REPRESENTATIVE:	
5	SYSTEM/S OF AVCP:	System 3
6a	HARMONISED STANDARD:	ETAG 005-8:2000
	Notified body/ies:	1219

Declaration of Performance

SikaFill®-100

33438794

2019.01 , Revision 1

1053

7 DECLARED PERFORMANCE/S


Essential Characteristics	Performance	Harmonized Technical Specification
External fire performance:	B _{Roof} (t1)	ETAG 005-8:2000
Reaction to fire:	Euroclass F	
Categorization by working life:	W2	
Categorization by climatic zones:	S	
Categorization by imposed loads:	P3	
Categorization by roof slope:	S1 to S4	
Categorization by Lowest:	TL3 (-20°C)	
Highest:	TH4 (90°C)	
Statement on dangerous substances:	None contained	

**8 APPROPRIATE TECHNICAL DOCUMENTATION AND/OR -
SPECIFIC TECHNICAL DOCUMENTATION**

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Name: Stamatis Antonakos
Function: TMM Roofing &
Waterproofing
At Athens on 19 June 2019

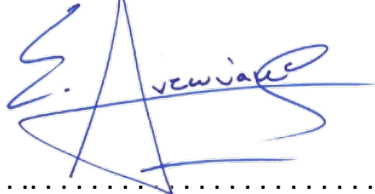

Name: Spyros Hatzifotis
Function: Managing Director
At Athens on 19 June 2019



End of information as required by Regulation (EU) No 305/2011

Declaration of Performance

SikaFill®-100
33438794
2019.01 , Revision 1
1053



15

Sika Services AG, Zurich, Switzerland

DoP No. 33438794

ETAG 005-8:2000

Notified Body 1219

Liquid-applied roof waterproofing kit based on polymers in water dispersion

External fire performance:	B _{Roof} (t ₁)
Reaction to fire:	Euroclass F
Categorization by working life:	W2
Categorization by climatic zones:	S
Categorization by imposed loads:	P3
Categorization by roof slope:	S1 to S4
Categorization by	
Lowest:	TL3 (-20°C)
Highest:	TH4 (90°C)
Statement on dangerous substances:	None contained

<http://dop.sika.com>

ECOLOGY, HEALTH AND SAFETY INFORMATION (REACH)

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety related data.

LEGAL NOTE

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sikas recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the products suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Declaration of Performance

SikaFill®-100

33438794

2019.01 , Revision 1

1053

3/4

BUILDING TRUST





Sika Hellas ABEE
Protomagias 15
14568, Kryoneri
Attica - Greece
www.sika.gr

Declaration of Performance
SikaFill®-100
33438794
2019.01 , Revision 1
1053

4/4

BUILDING TRUST

