

SYSTEM DATA SHEET

Sikafloor® MultiDur EB-27

SLIP RESISTANT BROADCAST COLOURED EPOXY FLOOR SYSTEM

DESCRIPTION

Sikafloor® MultiDur EB-27 is a 2-part epoxy coloured resin based flooring system that can provide a hard wearing, seamless, low maintenance, slip resistant finish when broadcast with different aggregate grades. For medium - heavy wear conditions. Its application thickness ranges between 2.0–4.0 mm. Suitable for internal use.

USES

Sikafloor® MultiDur EB-27 may only be used by experienced professionals.

- On concrete and cementitious screeds with normal up to medium heavy wear e.g. storage and assembly halls, maintenance workshops, garages and loading ramps.
- On multi-storey and underground car park decks and for wet process areas, e.g. beverage and food industry

CHARACTERISTICS / ADVANTAGES


- Seamless
- High wear resistance
- Good chemical and mechanical resistance
- Easy application
- Waterproof
- Gloss finish
- Slip resistant
- Low maintenance

APPROVALS / CERTIFICATES

Fire classification test, Bfl-S1 according to DIN EN 13501-1.

SYSTEMS

System Structure

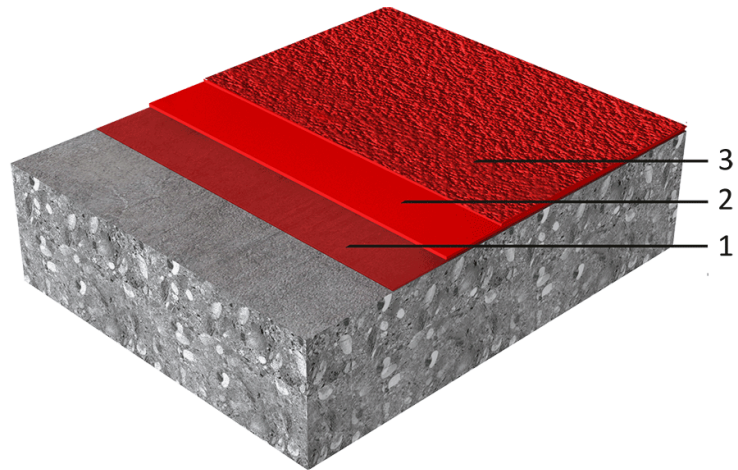

Sikafloor® MultiDur EB-27 system (~ 2–4 mm)

Layer	Product
1. Primer	Sikafloor®-156/-161/-160
2. Wearing finish	Sikafloor®-263 SL N or Sikafloor®-264 N broadcast with quartz sand in excess
3. Seal /Top coat	Sikafloor®-264 N

Chemical base	Epoxy
Appearance	Slip resistant, gloss finish
Colour	Available in many colours
Nominal Thickness	~2,0–4,0 mm

TECHNICAL INFORMATION

Reaction to Fire	Bfl-S1	(DIN EN 13501-1)
Chemical Resistance	Resistant to many chemicals. Contact Sika Technical Service for specific information.	
Thermal Resistance	Exposure*	Dry heat
	Permanent	+50 °C
	Short-term max. 7 d	+80 °C
	Short-term max. 12 h	+100 °C
	Short-term moist/wet heat* up to +80 °C where exposure is only occasional (i.e. during steam cleaning etc.)	
	*No simultaneous chemical and mechanical exposure.	
Skid / Slip Resistance	R11 V4 (Quartz Sand 0,3–0,8 mm)	(DIN 51130)
	R12 V6 (Quartz Sand 0,7–1,2 mm)	(DIN 51130)

APPLICATION INFORMATION

Consumption	Sikafloor® MultiDur EB-27 system (~ 2–4mm)			
	Flooring System	Product	Consumption	
	Primer	1 × Sikafloor®-156 /-160/-161	~ 0,3–0,5 kg/m ²	
	Wearing layer	Sikafloor®-263 SL N or Sikafloor®-264 N filled 1:1 with quartz sand 0,1–0,3mm	~ 4 kg /m ² (2 kg/m ² binder + 2 kg/m ² quartz sand)	
	Sand broadcast	Quartz sand 0,4 – 0,7 mm	~ 4–6 kg/m ²	
	Seal / Top coat	1–2 × Sikafloor®-264 N	~0,6–0,8 kg/m ²	
Product Temperature	Please refer to the individual Product Data Sheet			
Ambient Air Temperature	+10 °C min. / +30 °C max.			
Relative Air Humidity	80 % r.h. max.			
Dew Point	Beware of condensation! The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or blooming on the floor finish.			
Substrate Temperature	+10 °C min. / +30 °C max.			
Substrate Moisture Content	≤ 4% pbw Test method: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).			
Waiting Time / Overcoating	Before applying Sikafloor®-263 SL N/-264 N on Sikafloor®-156/-161/-160 allow:			
	Substrate temperature	Minimum	Maximum	
	+10 °C	24 hours	3 days	
	+20 °C	12 hours	2 days	
	+30 °C	8 hours	1 day	
	Before applying Sikafloor®-264 N on Sikafloor®-263 SL N /-264 N allow:			
	Substrate temperature	Minimum	Maximum	
	+10 °C	30 hours	48 hours	
	+20 °C	24 hours	30 hours	
	+30 °C	16 hours	24 hours	
	Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity			
Applied Product Ready for Use	Temperature	Foot traffic	Light traffic	Full cure
	+10 °C	~ 72 hours	~ 6 days	~ 10 days
	+20 °C	~ 24 hours	~ 4 days	~ 7 days
	+30 °C	~ 18 hours	~ 2 days	~ 5 days

PRODUCT INFORMATION

Packaging	Refer to the individual Product Data Sheet
Shelf life	Refer to the individual Product Data Sheet
Storage conditions	Refer to the individual Product Data Sheet

MAINTENANCE

CLEANING

Refer to the Method Statement Sikafloor®- Cleaning Regime

FURTHER DOCUMENTS

Refer to :

- Sika® Method Statement Mixing & Applications of Flooring systems
- Sika® Method Statement Evaluation and Preparation

IMPORTANT CONSIDERATIONS

- Do not apply Sikafloor® MultiDur EB-27 on substrates with rising moisture.
- Freshly applied Sikafloor® MultiDur EB-27 must be protected from damp, condensation and water for at least 24 hours.
- The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.
- For exact colour matching, ensure the Sikafloor®-264 N in each area is applied from the same control batch numbers.
- Under certain conditions, underfloor heating or high ambient temperatures combined with high point loading, may lead to indentations in the resin.
- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO₂ and H₂O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Hellas ABEE
15 Protomagias Str.
14568 Kryoneri
Attica-Greece
Tel.: +30 210 8160 600
Fax: +30 210 8160 606
www.sika.gr | sika@gr.sika.com



System Data Sheet
Sikafloor® MultiDur EB-27
May 2018, Version 01.01
020811900000000078

SikafloorMultiDurEB-27-en-GR-(05-2018)-1-1.pdf