
SikaDecor[®]-803 Plus

DECLARATION OF PERFORMANCE

No. 92159990

1	UNIQUE IDENTIFICATION CODE OF THE PRODUCT-TYPE:	92159990
2	INTENDED USE/S	EN13813:2002 Cementitious floor screed material CT-C60-F10
3	MANUFACTURER:	Sika Hellas ABEE 15 Protomagias Str. GR 145 68 Kryoneri Athens - Greece www.sika.gr
4	AUTHORISED REPRESENTATIVE:	
5	SYSTEM/S OF AVCP:	System 4
6a	HARMONISED STANDARD:	EN 13813:2002

Notified body/ies:

Declaration of Performance

SikaDecor[®]-803 Plus

92159990

20.07.2022 , ver. 2

1041

7 DECLARED PERFORMANCE/S

Essential Characteristics	Performance	AVCP	Harmonised Technical Specification
Reaction to fire	NPD		
Release of corrosive substances:	CT	System 4	
Water permeability	NPD	System 4	
Water vapour permeability	NPD	System 4	
Compressive strength	≥ C60	System 4	
Flexural strength	≥ F10	System 4	EN 13813:2002
Wear resistance	NPD	System 4	
Sound insulation	NPD	System 4	
Sound absorption	NPD	System 4	
Thermal resistance	NPD	System 4	
Chemical resistance	NPD	System 4	

NPD = No performance determined

8 APPROPRIATE TECHNICAL DOCUMENTATION AND/OR - SPECIFIC TECHNICAL DOCUMENTATION

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Name : Aggeliki Zacharopoulou
Function: QEHS Manager
At Athens on 20 July 2022

Name: Kostas Mourikis
Function: TMM Flooring
At Athens on 20 July 2022


.....


.....

End of information as required by Regulation (EU) No 305/2011

RELATED DECLARATION OF PERFORMANCE

Product Name	Harmonised technical specification	DoP Number
SikaDecor®-803 Plus	EN 998-1:2016	32834282

Declaration of Performance

SikaDecor®-803 Plus
92159990
20.07.2022 , ver. 2
1041



17

EN 13813: 2002

DoP No. 92159990

Sika Hellas ABEE, Athens - Greece

Cementitious floor screed material CT-C60-F10

Release of corrosive substances:	CT
Compressive strength	≥ C60
Flexural strength	≥ F10

<http://dop.sika.com>

ECOLOGY, HEALTH AND SAFETY INFORMATION (REACH)


For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety related data.

LEGAL NOTE

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sikas recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the products suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Declaration of Performance

SikaDecor®-803 Plus
92159990
20.07.2022 , ver. 2
1041

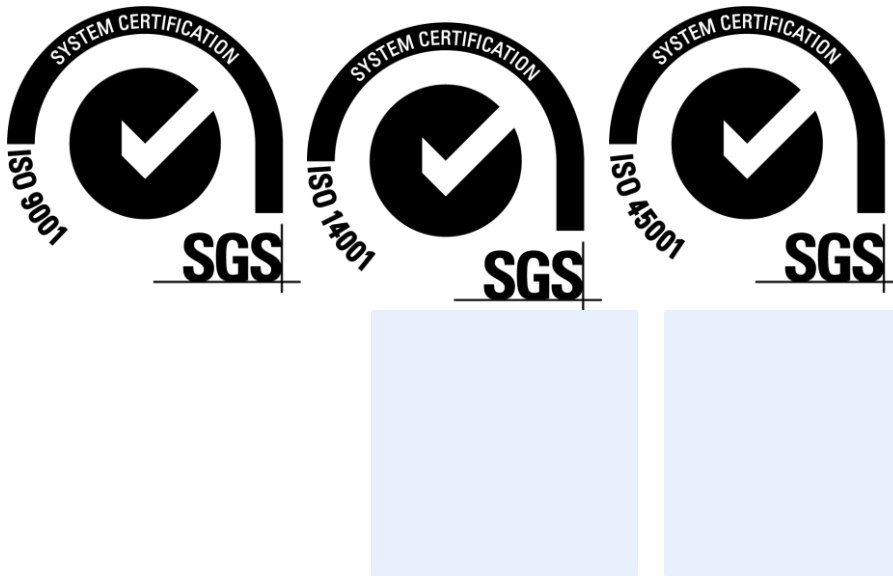

Declaration of Performance
SikaDecor®-803 Plus
92159990
20.07.2022 , ver. 2
1041