

SYSTEM DATA SHEET

Sikafloor® MultiFlex PS-32 UV

SMOOTH, UNICOLOR, TOUGH-ELASTIC POLYURETHANE FLOOR
COVERING WITH UV SEALER

**DESCRIPTION**

Sikafloor® MultiFlex PS-32 UV is a multipurpose, tough-elastic and smooth polyurethane flooring system and is part of the Sikafloor® Multiflex flooring range.

Sikafloor® MultiFlex PS-32 UV is especially designed for use in different indoor industrial applications where seamless, UV and colour stable, smooth and matt hardwearing floors are required and makes use of Sika's unique i-Cure technology to improve surface aesthetics and reduce sensitivity for ambient humidity during application.

Sikafloor® MultiFlex PS-32 UV consists of a tough elastic, crack bridging, i-Cure polyurethane base coat which fulfils as well the stringent demands for low VOC emitting products, over which a UV resistant sealer is applied to increase the system performances.

USES

Sikafloor® MultiFlex PS-32 UV may only be used by experienced professionals.

- Life Science industry
- Automotive industry
- Food & Beverage industry
- Industrial flooring for Storage, Logistic and Sales areas
- Retail (e.g. Shopping Malls)

CHARACTERISTICS / ADVANTAGES

- Good mechanical resistance
- Crack-bridging properties
- Good UV and colour stability
- Low dirt pick up
- Good chemical resistance
- Scratch resistant surface
- Easy to clean and maintain
- Seamless, gloss and smooth surface
- Low VOC content
- Flexible and tough-elastic

ENVIRONMENTAL INFORMATION

Emission test according to the German AgBB-scheme and guidelines of the DiBt (AgBB – Committee for Health-related Evaluation of Building Products, DiBt – German Institute for Building Technology). Sampling, testing and evaluation were performed according to ISO-16000, Report No. 392-2015-00212801_D_DE_02, Eurofins Product Testing A/S, Denmark.


APPROVALS / STANDARDS

- Synthetic resin screed material according to EN13813:2002, Declaration of Performance and provided with the CE marking
- Coating for surface protection of concrete according to EN 1504-2:2004, Declaration of Performance and provided with the CE marking
- Static crack bridging properties tested at IBOS GmbH, test report NO: 51-15-0056
- Fire classification reports No. 20150909/01 MPA Dresden
- Particle (vs.PA6) emission certificate: Cleanroom Suitable Materials - CSM. Statement of Qualification, class ISO 4. Tested by IPA report No. SI_1506-767.
- Particle (vs.PA6) emission certificate: Cleanroom Suitable Materials - CSM. Statement of Qualification, GMP A. Tested by IPA report No. SI_1506-767.
- Outgassing VOC emission certificate: Cleanroom Suitable Materials - CSM. Statement of Qualification, ISOAMCm class -7.3. Tested by IPA report No. SI_1506-767
- Biological Resistance Class "Very Good" – Cleanroom Suitable Materials. Evaluation of the biological resistance in accordance with ISO 846. Tested by IPA report No. SI_1506-767.

SYSTEM INFORMATION

System Structure

Sikafloor® MultiFlex PS-32 UV

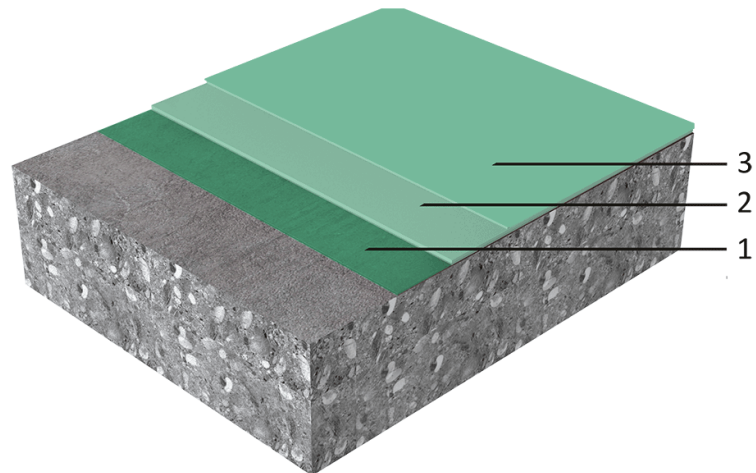

Layer	Product	Consumption
1. Primer	Sikafloor®-156 or Sikafloor®-160 or Sikafloor®-161	~0.4 kg/m ² /layer
2. Base coat	Sikafloor®-3240 (filled 1:0.5-0.7 with quartz sand 0.1-0.3 mm)	~1.8–1.9 kg/m ² /layer (mixture)
3. Top coat	Sikafloor®-305 W	~0.15 kg/m ² /layer

Consumptions are theoretical and do not include any wastage or additional materials needed due to porosity, substrate profile etc.
As optional primers Sikafloor®-144/-156/-701 can be used. Please refer to the individual Product Data Sheet. As optional sealer Sikafloor®-3570 can be used under its set of certifications and consumption rates. Please refer to the individual Product Data Sheet.

Chemical base	Polyurethane
Appearance	Smooth, matt finish
Colour	Almost unlimited colour shades. Please refer to Sikafloor®-305W.
Nominal Thickness	~2 mm
Volatile organic compound (VOC) content	Very low content of Volatile Organic Compounds. It fulfils the stringent demands for indoor air quality and low VOC emitting products AgBB, AFFSET, A+.

TECHNICAL INFORMATION

Shore D Hardness	~60 (7 days / 23 °C / 50 % r.h.)	(DIN 53505)
Tensile Strength	~14 N/mm ² (14 days / 23 °C / 50 % r.h.)	(DIN EN ISO 527-2)
Elongation at Break	~90 % (resin / 28 days / +23 °C / 50 % r.h.)	(ISO 527-2)
Crack Bridging Ability	~ 0.8 mm	(EN 1062-7)
Reaction to Fire	Bfl-s1	(EN 13501-1)
Resistance to Stubbed Cigarettes	Class 4	(EN 1399)
Chemical Resistance	Sikafloor® MultiFlex PS-32 UV always has to be sealed with Sikafloor®-305W. Therefore, refer to the chemical resistance of the Sikafloor®-305W.	
Resistance to UV Exposure	8 / Colour fastness	(EN ISO 105-B02:2002)
Skid / Slip Resistance	R10 / R11	(DIN 51130)

APPLICATION INFORMATION

Product Temperature	+10 °C min. / +30 °C max.																
Ambient Air Temperature	+10 °C min. / +30 °C max.																
Relative Air Humidity	80 % max.																
Dew Point	Beware of condensation! The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or blooming on the floor finish.																
Substrate Temperature	+10 °C min. / +30 °C max.																
Substrate Moisture Content	Sikafloor® MultiFlex PS-32 UV can be installed on substrates with moisture content of max. 4 % (checked by Tramex). The substrate needs to be visibly dry and have adequate pull-off strength min 1.5 N/mm ² . Check rising moisture.																
Applied Product Ready for Use	<table border="1"><thead><tr><th>Temperature</th><th>Foot traffic</th><th>Light traffic</th><th>Full cure</th></tr></thead><tbody><tr><td>+10 °C</td><td>~30 hours</td><td>~48 hours</td><td>~6 days</td></tr><tr><td>+20 °C</td><td>~16 hours</td><td>~24 hours</td><td>~4 days</td></tr><tr><td>+30 °C</td><td>~12 hours</td><td>~18 hours</td><td>~3 days</td></tr></tbody></table>	Temperature	Foot traffic	Light traffic	Full cure	+10 °C	~30 hours	~48 hours	~6 days	+20 °C	~16 hours	~24 hours	~4 days	+30 °C	~12 hours	~18 hours	~3 days
Temperature	Foot traffic	Light traffic	Full cure														
+10 °C	~30 hours	~48 hours	~6 days														
+20 °C	~16 hours	~24 hours	~4 days														
+30 °C	~12 hours	~18 hours	~3 days														

Note: Times are approximate and will be affected by changing ambient and substrate conditions

PRODUCT INFORMATION

Packaging	Please refer to the individual Product Data Sheets
Shelf life	Please refer to the individual Product Data Sheets
Storage conditions	Please refer to the individual Product Data Sheets

MAINTENANCE

CLEANING

Please refer to the Sikafloor® Cleaning Regime

- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO₂ and H₂O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

FURTHER DOCUMENTS

Substrate quality & Preparation

Please refer to Sika Method Statement: "Evaluation and preparation of surfaces for flooring systems".

Application instructions

Please refer to Sika Method Statement: "Mixing & Application of flooring systems".

Maintenance

Please refer to "Sikafloor®- Cleaning regime".

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control. All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LIMITATIONS

- Freshly applied Sikafloor® products must be protected from damp, condensation and water for at least 24 hours.
- Uncured material reacts in contact with water (foaming).
- During application care must be taken that no sweat drops into fresh Sikafloor® products (wear head and wrist bands).
- For exact colour matching, ensure the Sikafloor®-305 W product in each area is applied from the same control batch number.
- Under certain conditions, underfloor heating or high ambient temperatures combined with high point loading, may lead to imprints in the resin.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Hellas ABEE
15 Protomagias Str.
14568 Kryoneri
Attica-Greece
Tel.: +30 210 8160 600
Fax: +30 210 8160 606
www.sika.gr | sika@gr.sika.com



SikafloorMultiFlexPS-32UV_en_GR_(12-2016)_1_1.pdf

System Data Sheet
Sikafloor® MultiFlex PS-32 UV
December 2016, Version 01.01
020812900000000041