

SYSTEM DATA SHEET

Sikafloor® DecoDur ES-26 Flake

DECORATIVE, SMOOTH, LOW VOC, COLOURED FULL FLAKED EPOXY FLOOR COVERING

DESCRIPTION

Sikafloor® DecoDur ES-26 Flake is a decorative, coloured, smooth low VOC, full flaked floor covering designed for indoor applications.

USES

Sikafloor® DecoDur ES-26 Flake may only be used by experienced professionals.

- Particularly used in the life science, pharmaceutical industries and health care industry
- Education (e.g. Schools and Universities)
- Leisure & Culture (e.g. Museums, Stadiums)
- Retail (e.g. Shopping Malls)

CHARACTERISTICS / ADVANTAGES


- Decorative
- Low VOC-content
- Good mechanical and abrasion resistance
- Easy application

APPROVALS / CERTIFICATES

- Particle emission certificate Sikafloor® DecoDur ES-26 Flake CSM Statement of Qualification Report GMP A-No. SI 1008-533 (system tested with Sikafloor®-169 as a top coat)
- Biological resistance certificate Sikafloor® DecoDur ES-26 Flake CSM Statement of Qualification – ISO 846, very good - Report No. SI 1008-533. (system tested with Sikafloor®-169 as a top coat)
- Fire classification of Sikafloor® DecoDur ES-26 Flake in accordance with EN 13501-1, classification report-No. 2011-1379-K1, Exova Brandhaus, Germany, April 2011 (system tested with Sikafloor®-316 as a top coat)

SYSTEMS

System Structure

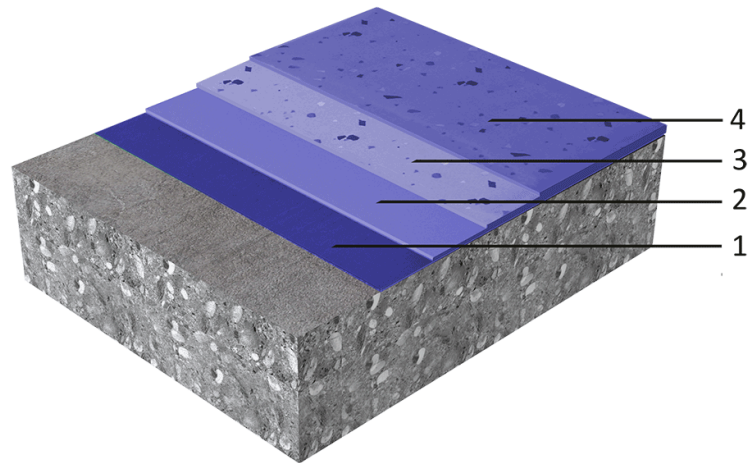

Sikafloor® DecoDur ES-26 Flake system

1. Primer	Sikafloor®-156, 160, 161 or 169
2. Wearing coat	Sikafloor®-263 SL or 264 pigmented approx. the same like the following Sika PVA ColorFlakes (filled 1:1 with quartz sand 0.1-0.3 mm)
3. Broadcast & seal coat	broadcast in excess with Sika®-PVA ColorFlakes 3 mm First seal coat with Sikafloor®-169. Soft grinding the next day and a second seal coat with Sikafloor®-169.
4. Top coat	Sikafloor®-316 with high scratch resistance

Chemical base

Epoxy

Appearance

Glossy orange peel finish possible

Colour



Nominal Thickness	~2-3mm
-------------------	--------

TECHNICAL INFORMATION

Reaction to Fire	Bfl-S1	(DIN EN 13501-1)
Chemical Resistance	Resistant to many chemicals. Contact Sika technical service for specific information.	
Skid / Slip Resistance	R9	(DIN 51130)

APPLICATION INFORMATION

Consumption		
Sikafloor® DecoDur ES-26 Flake system		
Coating System	Product	Consumption
Primer	1–2 × Sikafloor®-156, 160, 161 or 169	1–2 × ~0.3-0.5 kg/m ²
Wearing coat	Sikafloor®-263 SL or 264 pigmented approx. the same like the following flake mix , filled 1:1 with quartz sand 0.1-0.3 mm	~1.9 kg/m ² per mm
Broadcast	Broadcast in excess with Sika®-PVA Color-Flakes 3mm	~1.0 kg/m ²
First seal coat	1 x Sikafloor®-169	~0.6–0.7 kg/m ²
Second seal coat	1 x Sikafloor®-169 after sanding of the sealed surface	~0.3 kg/m ²
Top coat (optional)	1 x Sikafloor®-316 after sanding of the sealed surface	~0.1–0.12 kg/m ²
* Before applying Sikafloor®-316 please refer to the individual product data sheet		
Product Temperature	Please refer to the individual Product Data Sheets	
Ambient Air Temperature	+10 °C min. / +30 °C max.	
Relative Air Humidity	80 % r.h. max.	
Dew Point	Beware of condensation! The substrate and uncured floor must be at least 3°C above dew point to reduce the risk of condensation or blooming on the floor finish.	
Substrate Temperature	When performing application work with Sikafloor® DecoDur ES-26 Flake, the substrate moisture content must not exceed 4 % pbw measured by Tramex. Test method: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).	
Substrate Moisture Content	When performing application work with Sikafloor® DecoDur ES-26 Flake, the substrate moisture content must not exceed 4 % pbw measured by Tramex. Test method: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).	

Waiting Time / Overcoating

Before applying Sikafloor®-169 on Sikafloor®-156/ -161/ -160/ -264/-169 allow:

Substrate temperature	Minimum	Maximum
+10 °C	36 hours	4 days
+20 °C	12 hours	2 days
+30 °C	8 hours	1 day

Before applying Sikafloor®-316 on Sikafloor® epoxies, the surface has to be treated with a green Scotch-Brite™ pad to remove contaminations or be cleaned professionally with Kärcher RM 776 or Veroclean.

Substrate temperature	Minimum	Maximum
+10 °C	30 hours	4 days
+20 °C	24 hours	3 days
+30 °C	6 hours	2 days

Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.

Applied Product Ready for Use

Sikafloor®-169

Temperature	Foot traffic	Light traffic	Full cure
+10 °C	~ 48 hours	~ 6 days	~ 10 days
+20 °C	~ 30 hours	~ 4 days	~ 7 days
+30 °C	~ 20 hours	~ 3 days	~ 5 days

Sikafloor®-316

Temperature	Foot traffic	Light traffic	Full cure
+10 °C	~ 20 hours	~ 48 hours	~ 10 days
+20 °C	~ 16 hours	~ 36 hours	~ 7 days
+30 °C	~ 12 hours	~ 24 hours	~ 5 days

PRODUCT INFORMATION

Packaging

Please refer to the individual Product Data Sheets

Shelf life

Please refer to the individual Product Data Sheets

Storage conditions

Please refer to the individual Product Data Sheets

MAINTENANCE

CLEANING

Please refer to the Method Statement Sikafloor®-Cleaning Regime

FURTHER DOCUMENTS

Please refer to :

- Sika® Method Statement Mixing & Applications of Flooring systems
- Sika® Method Statement Evaluation and Preparation of Surfaces for Flooring systems
- Sika® Method Statement Sikafloor® DecoDur ES-26 Flake

LIMITATIONS

- Do not apply Sikafloor® DecoDur ES-26 Flake on substrates with rising moisture.
- Freshly applied Sikafloor® DecoDur ES-26 Flake must be protected from damp, condensation and water for at least 24 hours.
- The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective

cracking.

- For exact colour matching, ensure that all the products in each area are applied from the same control batch numbers.
- Under certain conditions, underfloor heating or high ambient temperatures combined with high point loading, may lead to imprints in the resin.
- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO₂ and H₂O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control. All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Hellas ABEE
15 Protomagias Str.
14568 Kryoneri
Attica-Greece
Tel.: +30 210 8160 600
Fax: +30 210 8160 606
www.sika.gr | sika@gr.sika.com



SikafloorDecoDurES-26Flake_en_GR_(10-2017)_4_1.pdf

System Data Sheet
Sikafloor® DecoDur ES-26 Flake
October 2017, Version 04.01
020811900000000012