

PRODUCT DATA SHEET

Sika AnchorFix® Resin Stoppers

ANCHORFIX TOOL TO ELIMINATE AIR VOIDS IN RESIN

DESCRIPTION


Sika AnchorFix® Resin Stoppers is a tool for filling deep and / or large diameter drilled holes by eliminating air voids. It is used with a Sika Anchorfix® flexible tube which is fixed onto the static mixer.

USES

- Eliminating air voids in deep and / or large diameter drilled holes

CHARACTERISTICS / ADVANTAGES

- Easy to use
- Re-usable (not a one use item)
- Diameter options for all drill hole sizes
- Full set available
- Prevents air voids in drill holes

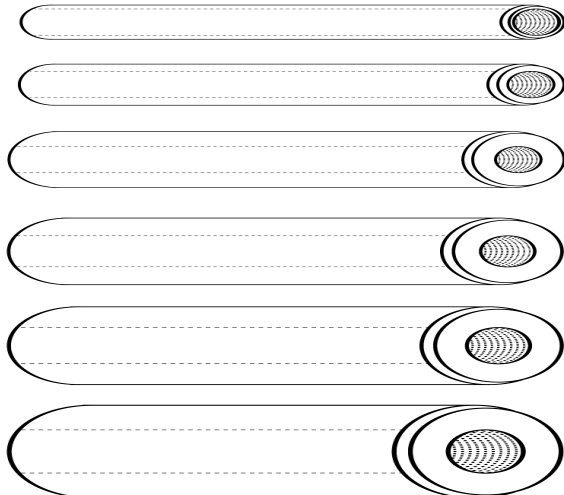

APPROVALS / CERTIFICATES

- Resin stoppers are referenced in the corresponding approvals of each Sika AnchorFix® product

PRODUCT INFORMATION

Packaging

Resin Stoppers

Bag of 1 piece / diameter

Bag of 10 pieces / diameter

Bag of 6 pieces with one piece per diameter: 18–50 mm (set)

Appearance / Colour	black		
Shelf life	5 years from the date of production		
Storage conditions	The product must be stored in original, unopened and undamaged sealed packaging in dry conditions at temperatures between +5 °C and +35 °C. Always refer to packaging.		
Dimensions	Resin Stoppers		
	Ø Diameter: (outer)	Ø Diameter (inner)	Length
	18 mm	14 mm (thread)	60 mm
	22 mm	14 mm (thread)	60 mm
	30 mm	14 mm (thread)	60 mm
	36 mm	14 mm (thread)	60 mm
	42 mm	14 mm (thread)	60 mm
	50 mm	14 mm (thread)	60 mm
	Flexible Tubes		
	Ø Diameter: (outer)	Ø Diameter (inner)	Length
	14 mm	10 mm	300 mm
	14 mm	10 mm	1000 mm

SYSTEMS

System Structure	Ancillary products: <ul style="list-style-type: none">▪ Sika AnchorFix® Static Mixer / Nozzle▪ 14 mm (9/16") O/D reinforced flexible tube
-------------------------	--

APPLICATION INSTRUCTIONS

- Sika Method Statement: Sika AnchorFix®
- Sika AnchorFix®: Approvals

APPLICATION METHOD / TOOLS

General

All resin stoppers must be used in conjunction with a 14 mm (9/16") outer diameter (O/D) Sika Anchorfix® flexible tube.

The tube must be applied on the original static mixer of an AnchorFix® product.

Installation procedure

Insert resin stopper to bottom of the hole. Pump resin material and allow the hole to fill.

Always insert the Sika Anchorfix® flexible tube so that it is flush with the outlet of the resin stopper. After use, wipe resin stopper clean with a damp cloth and reuse.

FURTHER INFORMATION

- Sika AnchorFix®: Product Data Sheets

IMPORTANT CONSIDERATIONS

- Only use original Sika AnchorFix® Resin Stoppers

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY, HEALTH AND SAFETY

REGULATION (EC) NO 1907/2006 - REACH

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in this product data sheet. Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0.1% (w/w).

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its

products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Hellas ABEE

15 Protomagias Str.
14568 Kryoneri
Attica-Greece
Tel.: +30 210 8160 600
Fax: +30 210 8160 606
www.sika.gr | sika@gr.sika.com



Product Data Sheet

Sika AnchorFix® Resin Stoppers
November 2019, Version 01.01
020205020000000007

SikaAnchorFixResinStoppers-en-GR-(11-2019)-1-1.pdf