

SYSTEM DATA SHEET

Sikafloor® MultiDur ES-14 EQ

SMOOTH UNICOLOUR CLEAN ROOM CERTIFIED EPOXY FLOOR COVERING

DESCRIPTION

Sikafloor® MultiDur ES-14 EQ is a smooth coloured low VOC/AMC emission rigid system for flooring applications

USES

Sikafloor® MultiDur ES-14 EQ may only be used by experienced professionals.

- Especially designed for the use in cleanroom environment, where low VOC/AMC and particle emissions are mandatory.
- Also suitable as a hard wearing coat for many industries, such as automotive, pharmaceutical, storage facilities and warehouses.
- Suitable for residential areas


CHARACTERISTICS / ADVANTAGES

- Extremely low VOC
- Bishenol A and benzylalcohol free system
- Dodecylphenol free
- Good chemical and mechanical resistance
- Easy to clean
- Liquid proof

SYSTEMS

System Structure

Sikafloor® MultiDur ES-14 EQ

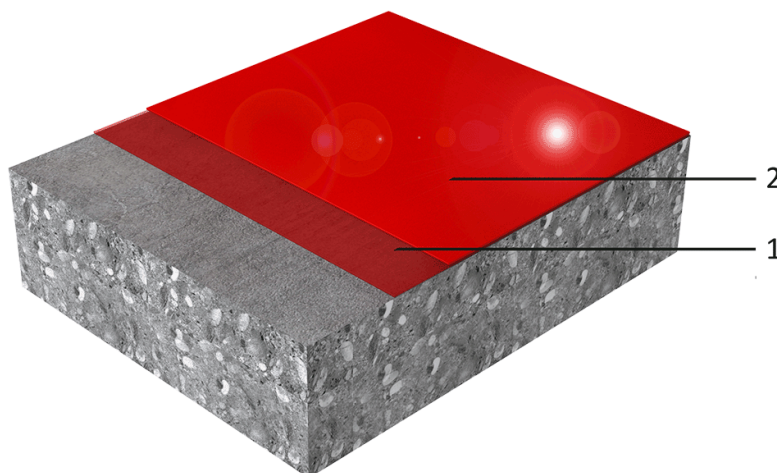

| Layer | Products |
|-----------------|---------------------|
| 1. Primer | Sikafloor®-701/-702 |
| 2. Wearing Coat | Sikafloor®-710 |

| | |
|-------------------|---|
| Chemical base | Epoxy |
| Appearance | Smooth gloss finish |
| Colour | Almost unlimited choice of colour shades. |
| Nominal Thickness | ~0.4–0.6 mm |

TECHNICAL INFORMATION

| | | |
|--|---|---------------------------------|
| Abrasion Resistance | 30 mg (CS 10/1000/1000) (7 days / +23 °C) | (DIN 53 109 Taber Abraser Test) |
| Tensile Adhesion Strength | > 1.5 N/mm ² (failure in concrete) | (ISO 4624) |
| Thermal Resistance | Exposure* | Dry heat |
| | Permanent | +50 °C |
| | Short-term max. 7 d | +80 °C |
| Short-term moist/wet heat* up to +80 °C where exposure is only occasional (steam cleaning etc.). | | |
| *No simultaneous chemical and mechanical exposure. | | |

APPLICATION INFORMATION

| | | | |
|-------------------------|--|---------------------|--|
| Consumption | Sikafloor® MultiDur ES-14 EQ system (~1.5–2.0 mm) | | |
| | Coating System | Product | Consumption |
| | Primer | Sikafloor®-701/-702 | ~1 × 0.3–0.5 kg/m ² |
| | Wearing coat | Sikafloor®-710 | 1–2 × 0.3–0.5 kg/m ² for each layer |
| Product Temperature | Please refer to the individual Product Data Sheet | | |
| Ambient Air Temperature | +10 °C min. / +30 °C max. | | |
| Relative Air Humidity | 80 % r.h. max. | | |
| Dew Point | Beware of condensation! The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or blooming on the floor finish. | | |
| Substrate Temperature | +10 °C min. / +30 °C max. | | |

Substrate Moisture Content

When performing application work with Sikafloor® MultiDur ES-14 EQ, the substrate moisture content must not exceed 4 % pbw measured by Tramex.

Test method: Sika®-Tramex meter, CM - measurement or Oven-dry-method.

No rising moisture according to ASTM (Polyethylene-sheet).

Waiting Time / Overcoating

Before applying Sikafloor®-710 on Sikafloor®-701 allow:

| Substrate temperature | Minimum | Maximum |
|-----------------------|----------|---------|
| +10 °C | 30 hours | 4 days |
| +20 °C | 16 hours | 2 days |
| +30 °C | 10 hours | 1 day |

Before applying Sikafloor®-710 on Sikafloor®-702 allow:

| Substrate temperature | Minimum | Maximum |
|-----------------------|----------|---------|
| +10 °C | 36 hours | 4 days |
| +20 °C | 18 hours | 2 days |
| +30 °C | 10 hours | 1 day |

Applied Product Ready for Use

| Temperature | Foot traffic | Light traffic | Full cure |
|-------------|--------------|---------------|-----------|
| +10 °C | ~72 hours | ~6 days | ~10 days |
| +20 °C | ~24 hours | ~4 days | ~7 days |
| +30 °C | ~18 hours | ~2 days | ~5 days |

PRODUCT INFORMATION

Packaging

Please refer to the individual Product Data Sheets

Shelf life

Please refer to the individual Product Data Sheets

Storage conditions

Please refer to the individual Product Data Sheets

MAINTENANCE

CLEANING

Please refer to the Method Statement Sikafloor®-Cleaning Regime

FURTHER DOCUMENTS

Please refer to :

- Sika® Method Statement Mixing & Applications of Flooring systems
- Sika® Method Statement Evaluation and Preparation of Surfaces for Flooring systems

LIMITATIONS

- Do not apply Sikafloor® MultiDur ES-14 EQ on substrates with rising moisture.
- Freshly applied Sikafloor® MultiDur ES-14 EQ must be protected from damp, condensation and water for at least 24 hours.
- The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.
- For exact colour matching, ensure the Sikafloor®-710 in each area is applied from the same control batch numbers.
- Under certain conditions, underfloor heating or high ambient temperatures combined with high point loading, may lead to imprints in the resin.
- If heating is required do not use gas, oil, paraffin or

other fossil fuel heaters, these produce large quantities of both CO₂ and H₂O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control. All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Hellas ABEE
15 Protomagias Str.
14568 Kryoneri
Attica-Greece
Tel.: +30 210 8160 600
Fax: +30 210 8160 606
www.sika.gr | sika@gr.sika.com



SikafloorMultiDurES-14EQ_en_GR_(04-2017)_1_1.pdf

System Data Sheet
Sikafloor® MultiDur ES-14 EQ
April 2017, Version 01.01
020811900000000023