



Sikaflex[®]-291i

THE VERSATILE SEALANT

- Simple and safe application
- Long open time
- Wide adhesion range

BUILDING TRUST



Sikaflex®-291i


THE STRONG MARITIME SEALANT

Sikaflex®-291i is a multi purpose one-component sealant and is used in the boat and ship building industry. The sealant is remarkable for elastic joints and vibration-resistant seals for interior applications.

Its medium modulus allows bonding applications with limited stress and thanks to the wide adhesion range Sikaflex®-291i adheres to most common used substrates in the marine industry.

FEATURES AND BENEFITS

- Highly elastic
- Sea water and hydrolysis resistant
- Solvent free
- Non-corrosive
- Wide adhesion range

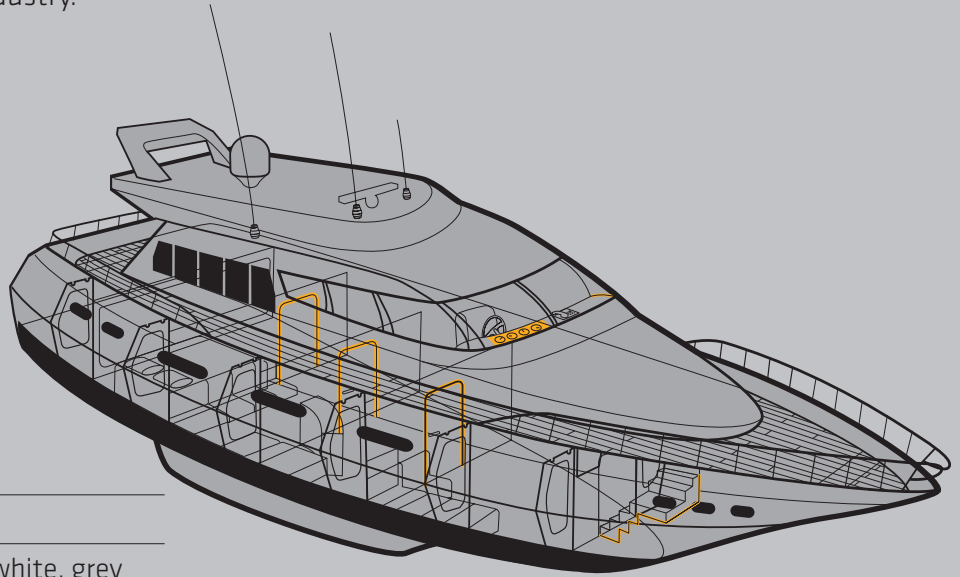

Technical Properties

Colors	Black, white, grey
Tack-free time*	60 minutes approx.
Elongation at break (DIN 53504)	> 500%
Tensile strength (ISO 37)	1.8 MPa approx.
Application temperature	+10°C to +40°C
Service temperature (continuous) short term (up to 4 hours)	-40°C to +90°C +120°C
Shelf life (stored below 25°C)	12 months
Method of application	Hand- or air- gun

* = at 23°C and 50% relative humidity

Our most current General Sales Conditions shall apply. Please consult the most current local Product Data Sheet prior to any use.



SIKA SERVICES AG
Tueffenwies 16
8048 Zurich
Switzerland

Contact
Phone: +41 58 436 40 40
Fax: +41 58 436 55 30
www.sika.com/marine

BUILDING TRUST

