

## SYSTEM DATA SHEET

# Sikagard® WallCoat WS-11 ESD

WATER-BASED EPOXY AND POLYURETHANE COMBINATION ESD WALL COATING SYSTEM



## DESCRIPTION

Sikagard® WallCoat WS-11 ESD is a water-based, epoxy and polyurethane combination, ESD wall coating system. The system is designed to dissipate electrostatic charges (ESD) and protect personnel and sensitive equipment in electrostatic protected areas (EPA).

## USES

Sikagard® WallCoat WS-11 ESD may only be used by experienced professionals.

Resin wall coating on cementitious substrates for:

- Electrostatic protected areas (EPA)
- Areas requiring the lowest electrostatic charge (low BVG (Body Voltage Generation)) and dissipative surface
- Electronic production areas
- Automotive production plants
- Chemical production plants
- Laboratories
- Pharmaceutical production areas
- Explosive storage and handling areas
- Explosive dust environments
- Microbiology/microchemistry production areas
- Telephone exchanges
- Workshops
- Computer / server rooms
- Interior use only

## CHARACTERISTICS / ADVANTAGES

- Thickness ~0,3–0,5 mm
- Low VOC emissions top coat
- Easy to apply
- Easy to refurbish, topcoat can be recoated
- Easy to clean
- Conforms to the requirements of ANSI/ESD S20.20 and IEC 61340-5-1
- Smooth matt surface finish

## SUSTAINABILITY

- Conformity with LEED v2009 IEQc 4.2: Low-Emitting Materials - Paints and Coatings - Sikafloor®-305 W ESD


## APPROVALS / CERTIFICATES

- CE Marking and Declaration of Performance to EN 1504-2 - Surface protection product for concrete - Coating
- CE Marking and Declaration of Performance to EN 13813 - Resin screed material for internal use in buildings

# SYSTEMS

## System Structure

### Sikagard® WallCoat WS-11 ESD ~ 0,3–0,5 mm:

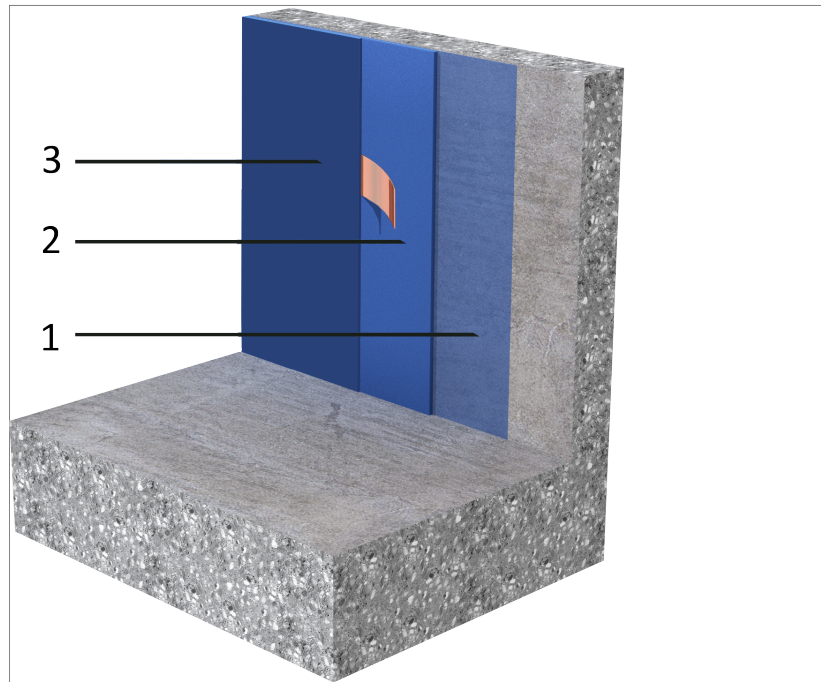

Layer	Product
1. Primer	1 × Sikagard® Wallcoat N
2. Intermediate layer + Earthing connection	1 × Sikagard® Wallcoat N + Sika® Earthing Kit
3. ESD wall coating	2 × Sikafloor®-305 W ESD

The system structure layers as described in table must not be changed.

<b>Composition</b>	Primer & intermediate layer:	Water-based epoxy
	ESD wall coat	Water-based polyurethane
<b>Appearance</b>	Smooth matt finish	
<b>Nominal Thickness</b>	~0,3–0,5 mm	

## TECHNICAL INFORMATION

<b>Electrostatic Behaviour</b>	Typical average resistance $R_g < \sim 10^5\text{--}10^7\Omega$ to ground	(IEC 61340-4-1)
	Readings may vary depending on ambient conditions (i.e. temperature, humidity) and measurement equipment.	

## APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	1. Primer	Sikagard® Wallcoat N + 5% water by weight	1 × ~0,15–0,20 kg/m <sup>2</sup>
	2. Intermediate layer	Sikagard® Wallcoat N	1 × ~0,15–0,25 kg/m <sup>2</sup>
	3. Earthing connection	Sika® Earthing Kit	1 earthing point per ~200–300 m <sup>2</sup> . 2 per room minimum
	3. ESD wall coat	Sikafloor®-305 W ESD + 10% water by weight	2 × ~0,15 kg/m <sup>2</sup> per coat

These figures are theoretical and do not allow for any additional material due to surface porosity, surface profile, variations in level and wastage etc.

<b>Product Temperature</b>	+10 °C min. / +30 °C max.																																						
<b>Ambient Air Temperature</b>	+10 °C min. / +30 °C max.																																						
<b>Relative Air Humidity</b>	During curing the humidity must not exceed 75 %. There must be a sufficient supply of fresh air or a dehumidifier to remove excess moisture from cured water based products.																																						
<b>Dew Point</b>	Beware of condensation. The substrate and uncured applied floor materials must be at least +3 °C above dew point to reduce the risk of condensation or blooming on the surface of the applied product.																																						
<b>Substrate Temperature</b>	+10 °C min. / +30 °C max.																																						
<b>Substrate Moisture Content</b>	≤ 4 % parts by weight. The following test methods can be used: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).																																						
<b>Waiting Time / Overcoating</b>	<p>Before applying Sikagard® Wallcoat N on Sikagard® Wallcoat N diluted with 5% water allow:</p> <table border="1"> <thead> <tr> <th><b>Substrate temperature</b></th> <th><b>Minimum</b></th> <th><b>Maximum*</b></th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>3 hours</td> <td>7 days</td> </tr> <tr> <td>+20 °C</td> <td>3 hours</td> <td>7 days</td> </tr> <tr> <td>+30 °C</td> <td>2 hours</td> <td>7 days</td> </tr> </tbody> </table> <p>Before applying Sikafloor®-305 W ESD on Sikagard® Wallcoat N allow:</p> <table border="1"> <thead> <tr> <th><b>Substrate temperature</b></th> <th><b>Minimum</b></th> <th><b>Maximum*</b></th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>3 hours</td> <td>7 days</td> </tr> <tr> <td>+20 °C</td> <td>3 hours</td> <td>7 days</td> </tr> <tr> <td>+30 °C</td> <td>2 hours</td> <td>7 days</td> </tr> </tbody> </table> <p>Before applying Sikafloor®-305 W ESD on Sikafloor®-305 W ESD allow:</p> <table border="1"> <thead> <tr> <th><b>Substrate temperature</b></th> <th><b>Minimum</b></th> <th><b>Maximum*</b></th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>48 hours</td> <td>10 days</td> </tr> <tr> <td>+20 °C</td> <td>24 hours</td> <td>8 days</td> </tr> <tr> <td>+30 °C</td> <td>16 hours</td> <td>7 days</td> </tr> </tbody> </table> <p>* If the maximum waiting time is exceeded, the coating must to be lightly abraded e.g. with a 3M™ Brown Stripper disc, belt or pad. Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.</p>			<b>Substrate temperature</b>	<b>Minimum</b>	<b>Maximum*</b>	+10 °C	3 hours	7 days	+20 °C	3 hours	7 days	+30 °C	2 hours	7 days	<b>Substrate temperature</b>	<b>Minimum</b>	<b>Maximum*</b>	+10 °C	3 hours	7 days	+20 °C	3 hours	7 days	+30 °C	2 hours	7 days	<b>Substrate temperature</b>	<b>Minimum</b>	<b>Maximum*</b>	+10 °C	48 hours	10 days	+20 °C	24 hours	8 days	+30 °C	16 hours	7 days
<b>Substrate temperature</b>	<b>Minimum</b>	<b>Maximum*</b>																																					
+10 °C	3 hours	7 days																																					
+20 °C	3 hours	7 days																																					
+30 °C	2 hours	7 days																																					
<b>Substrate temperature</b>	<b>Minimum</b>	<b>Maximum*</b>																																					
+10 °C	3 hours	7 days																																					
+20 °C	3 hours	7 days																																					
+30 °C	2 hours	7 days																																					
<b>Substrate temperature</b>	<b>Minimum</b>	<b>Maximum*</b>																																					
+10 °C	48 hours	10 days																																					
+20 °C	24 hours	8 days																																					
+30 °C	16 hours	7 days																																					
<b>Applied Product Ready for Use</b>	<table border="1"> <thead> <tr> <th><b>Temperature</b></th> <th><b>Light exposure</b></th> <th><b>Full cure</b></th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>~5 days</td> <td>~10 days</td> </tr> <tr> <td>+20 °C</td> <td>~3 days</td> <td>~8 days</td> </tr> <tr> <td>+30 °C</td> <td>~2 days</td> <td>~7 days</td> </tr> </tbody> </table>	<b>Temperature</b>	<b>Light exposure</b>	<b>Full cure</b>	+10 °C	~5 days	~10 days	+20 °C	~3 days	~8 days	+30 °C	~2 days	~7 days	<p>Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.</p>																									
<b>Temperature</b>	<b>Light exposure</b>	<b>Full cure</b>																																					
+10 °C	~5 days	~10 days																																					
+20 °C	~3 days	~8 days																																					
+30 °C	~2 days	~7 days																																					

## PRODUCT INFORMATION

<b>Packaging</b>	Refer to the individual Product Data Sheets
<b>Shelf life</b>	Refer to the individual Product Data Sheets
<b>Storage conditions</b>	Refer to the individual Product Data Sheets

## FURTHER INFORMATION

- Sika Method Statement: Sikafloor®-Cleaning Regime
- Sika Method Statement: Mixing & Applications of Flooring Systems
- Sika Method Statement: Evaluation and Preparation of Surfaces for Flooring Systems
- Sika Method Statement: Sikafloor®-305 W ESD
- Individual Product Data Sheets within the flooring system

## IMPORTANT CONSIDERATIONS

- Do not apply Sikagard® WallCoat WS-11 ESD on substrates with permeating moisture.
- Uncured material reacts in contact with water (foaming).
- During application care must be taken that no sweat falls onto the fresh Sikafloor® products. Wear head and wrist bands.
- The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.
- Sikafloor®-305 W ESD must be diluted with 10 % water.
- Apply Sikafloor®-305 W ESD only to tack free Sikagard Wallcoat N.
- When applying Sikafloor®-305 W ESD, lower consumption can cause roller marks, gloss differences and irregular surface structure. Higher consumption results in water retention and can cause pigment floatation as well as unsatisfactory conductivity.
- Ensure adequate ventilation during application and drying especially at temperatures less than +13 °C, otherwise the reaction and drying processes may be affected.
- If the wall is exposed to chemical and / or mechanical loads, the conductivity must be checked regularly. If necessary to maintain the specified conductivity, Sikafloor®-305 W ESD must be refreshed. This must be coordinated with the authorised ESD-representative or equivalent.
- For exact colour matching, ensure the Sikagard® WallCoat WS-11 ESD in each area is applied from the same control batch numbers.
- If temporary heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO<sub>2</sub> and H<sub>2</sub>O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.
- Sika does not assume any liability for possible changes in the composition of the recommended cleaning and maintenance agents and their effects on the floor characteristics.
- Measurement results can be affected by ESD clothing, ambient conditions, measurement equipment,

cleanliness of the floor and test personnel.

- If their are increased demands on the cleanability, Sikafloor®-305 W ESD can be over coated with the static dissipative floor polish "Jontec ESD" or "Jontec Destat" from Diversey Care or equivalent. Refer to the cleaning regime of Sikafloor®-305 W ESD.

All measurement values for the Sikagard® WallCoat WS-11 ESD system stated in the System Data Sheet (except those referring to proof statements) were measured under the following conditions:

Ambient conditions:	+23 °C/50 %
Measurement device for the Resistance to Ground:	Metriso 2000 or 3000 (Warmbier) or comparable
Surface resistance probe:	Carbon Rubber electrode. Weight: 2,50 kg
Rubber pad hardness:	Shore A 60 (± 10)

If values are lower/higher than required, additional measurements must be carried out, ~30 cm around the point where the faulty readings are located. If the re-measured values are in accordance with the requirements, the total area is acceptable.

Installation of earthing points: Refer to Sika® Method Statement: Mixing & Applications of Flooring Systems. Numbers of earth connections per room: Minimum of 2 earthing points. The optimum number of earth connections depends on the local conditions and must be specified on available drawings or other contract documentation.

## BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

## ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

## DIRECTIVE 2004/42/CE LIMITATION OF EMISSIONS OF VOC

According to the EU-Directive 2004/42, the maximum allowed content of VOC (Product category IIA / j type wb) is 140 g/l (Limit 2010) for the ready to use product.

The maximum content of Sikafloor-305 W ESD is < 140 g/l VOC for the ready to use product.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

### Sika Hellas ABEE

15 Protomagias Str.  
14568 Kryoneri  
Attica-Greece  
Tel.: +30 210 8160 600  
Fax: +30 210 8160 606  
www.sika.gr | sika@gr.sika.com



### System Data Sheet

Sikagard® WallCoat WS-11 ESD  
May 2020, Version 01.01  
020812910000000002

SikagardWallCoatWS-11ESD-en-GR-(05-2020)-1-1.pdf