

# Sika Tiling System Solutions

THE PROVEN SOLUTION FOR WETROOMS -  
ETAG 022 approval



## SIKA® OFFERS AN ESPECIFIC SYSTEM WHICH COMPLIES WITH ETAG 022, PART 1:

- 1. Primer: Sikafloor® Primer range,** including Sikafloor®-01 Primer, -02 Primer and -03 Primer
- 2. Sealing tape: Sika® SealTape F,** including Sika® SealTape F accessories
- 3. Liquid applied membrane: Sikafloor®-220 W,** applicable by trowel and roller in two layers
- 4. Tile adhesive: SikaCeram® range,** including SikaCeram®-250 StarFix, SikaCeram®-260 StarFlex, SikaCeram®-270 MultiFlow, SikaCeram®-290 StarLight, SikaCeram®-295 StarS2 and SikaCeram®-355 StarPaste

# KNOW-HOW FROM SITE TO SHELF

BUILDING TRUST 

AVOID STRESS BETWEEN  
SUBSTRATE AND TILES,  
WITH Sika® SealTape F!



Your Local Sika Partner:

Our most current General Sales Conditions shall apply.  
Please consult the most current local Product Data Sheet prior to any use.

### Sika Services AG

Refurbishment  
CH-8048 Zurich  
Switzerland  
Phone +41 58 436 40 40  
[www.sika.com](http://www.sika.com)

© SIKA SERVICES AG / CONCRETE / CML / Sika® SealTape F / 12.2017 / 10.80324



BUILDING TRUST



# Sika® SealTape F and accessories

THE NEW WATERPROOFING SYSTEM TO ELIMINATE STRESS BETWEEN SUBSTRATE AND TILES

## ADVANTAGES

Sika® SealTape F is an elastic membrane that in combination with Sika® waterproofing products is used to waterproof areas such as:


- Pipe penetrations
- Drains
- Wall corners
- Floor-to-wall connections
- etc.

## IDEAL TO USE IN

- Wet rooms
- Cellars
- Kitchens
- Balconies and terraces
- In and around swimming pools\*

\*it does not replace Sikadur®-Combiflex-SG System

ETAG stands for European Technical Approval Guidelines. ETAG 022 is for "watertight covering kits for wet room floors and or walls".

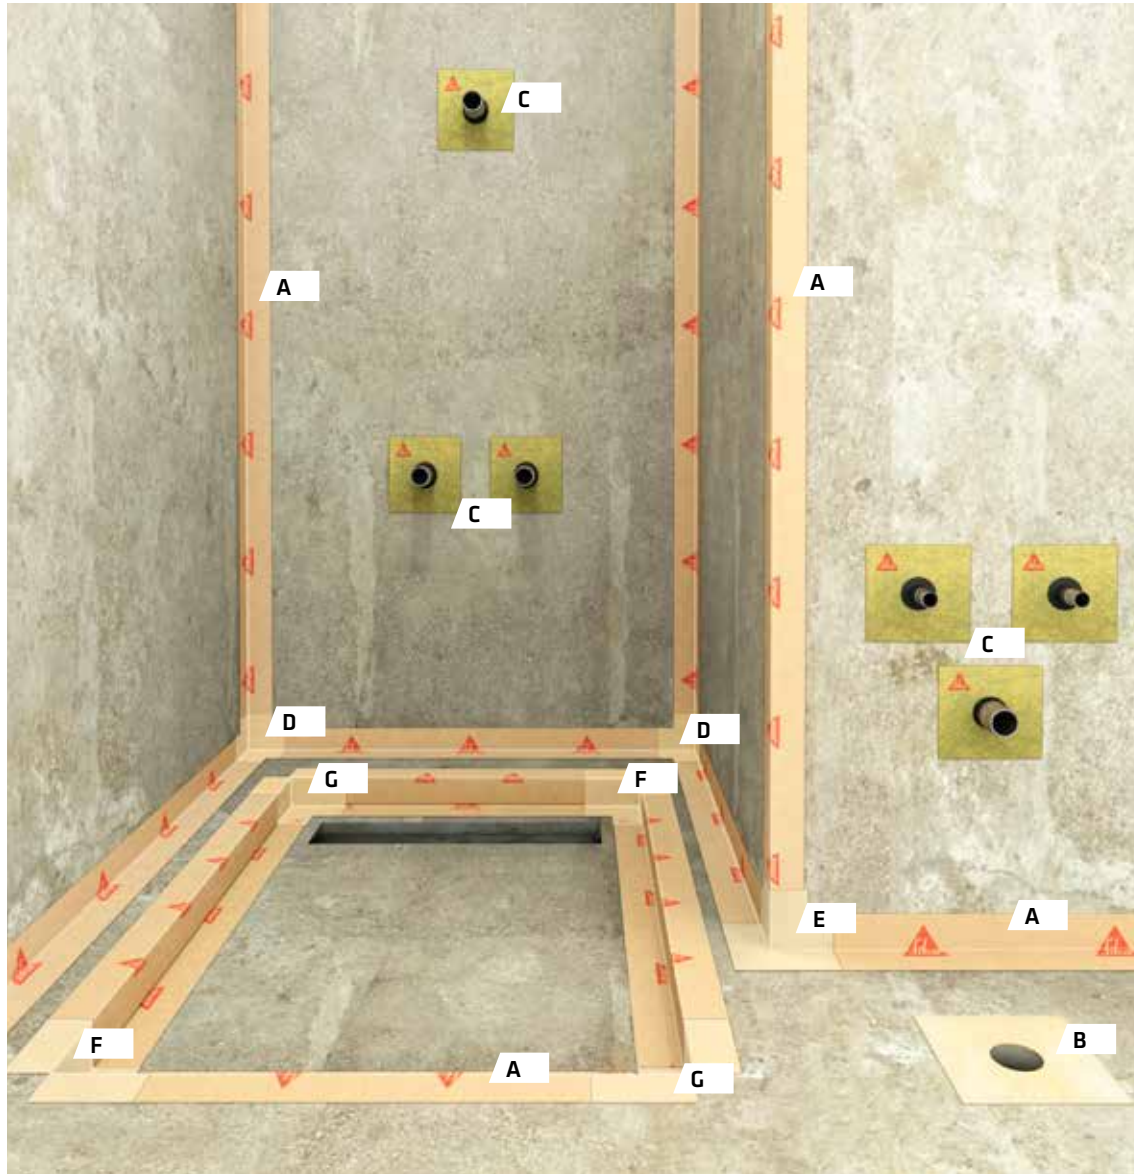

Sika® SealTape F and accessories for a watertight application.

## CHARACTERISTICS

**HIGH BREAKING RESISTANCE**

**Alkaline resistant**



**Resistant to attack from cement or lime; ideal to be used beneath tiles**

**High elasticity and minimal thickness**



**Very easy to apply**

### Sika® SealTape F range

<b>A</b>  25 m/120 mm	<b>A</b>  50 m/120 mm	Sealing tape (TPE) with a polypropylene non-woven fleece Sika® SealTape F Waterproofing tape in 25 m roll Sika® SealTape F Waterproofing tape in 50 m roll
<b>B</b>  425 mm 425 mm	<b>C</b>  120 mm 120 mm ø = 14 mm	Sika® SealTape F Floor patch Sika® SealTape F Wall patch with ø = 14 mm
<b>D</b>  140 mm 140 mm	<b>E</b>  140 mm 140 mm	Sika® SealTape F Inside corner Sika® SealTape F Outside corner
<b>F</b>  20 mm	<b>G</b>  20 mm	Sika® SealTape F Slope corner 20 mm left Sika® SealTape F Slope corner 20 mm right It is also available in 28 mm and 38 mm