

SYSTEM DATA SHEET

Sikafloor® MultiDur ES-14

UNICOLOUR EPOXY ROLLER COAT FLOORING SYSTEM

DESCRIPTION

Sikafloor® MultiDur ES-14 is a smooth, coloured, rigid flooring system based on epoxy resins.

USES

Sikafloor® MultiDur ES-14 may only be used by experienced professionals.

- For concrete and cement screeds with normal up to medium heavy wear e.g. storage and assembly halls, maintenance workshops, garages
- For production and processing areas, warehouses, car park decks.


CHARACTERISTICS / ADVANTAGES

- Good chemical and mechanical resistance
- Good wear and abrasion resistance
- Easy application
- Liquid proof
- Gloss finish
- Easy cleanability
- Colour options

SYSTEMS

System Structure

Sikafloor® MultiDur ES-14

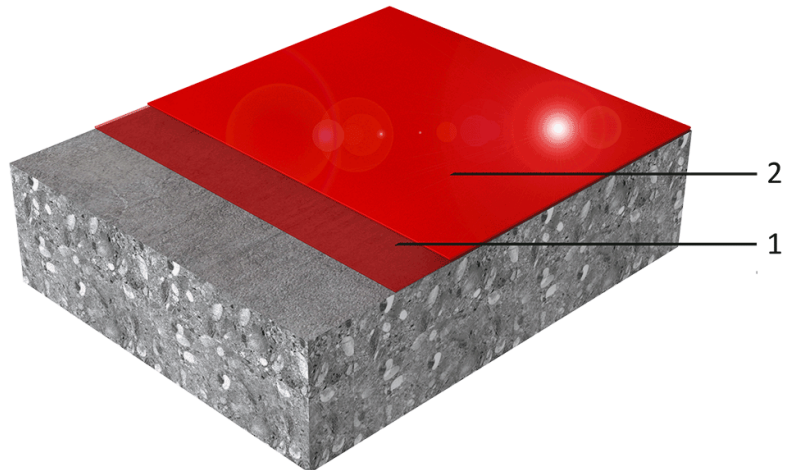

Layer	Product
1. Primer	Sikafloor®-156/-161/-160
2. Top coat	Sikafloor®-264

Chemical base	Epoxy
Appearance	Gloss finish
Colour	Available in various colour shades
Nominal Thickness	0.6–0.8 mm

TECHNICAL INFORMATION

Shore D Hardness	~76 (7 days / +23 °C)	(DIN 53 505)								
Abrasion Resistance	~28 mg (CS 10/1000/1000) (7 days / +23 °C)	(DIN 53109)								
Tensile Adhesion Strength	> 1.5 N/mm ² (failure in concrete)	(ISO 4624)								
Chemical Resistance	Please refer to the chemical resistance chart of Sikafloor®- 264									
Thermal Resistance	<table border="1"> <thead> <tr> <th>Exposure*</th> <th>Dry heat</th> </tr> </thead> <tbody> <tr> <td>Permanent</td> <td>+50 °C</td> </tr> <tr> <td>Short-term max. 7 d</td> <td>+80 °C</td> </tr> <tr> <td>Short-term max. 12 h</td> <td>+100 °C</td> </tr> </tbody> </table>	Exposure*	Dry heat	Permanent	+50 °C	Short-term max. 7 d	+80 °C	Short-term max. 12 h	+100 °C	
Exposure*	Dry heat									
Permanent	+50 °C									
Short-term max. 7 d	+80 °C									
Short-term max. 12 h	+100 °C									
	Short-term moist/wet heat* up to +80°C where exposure is only occasional (steam cleaning etc.)									
	*No simultaneous chemical and mechanical exposure.									

APPLICATION INFORMATION

Consumption	Sikafloor® MultiDur ES-14 system		
	Coating System	Product	Consumption
	Primer	1-2 x Sikafloor®-156/-161/-160	1-2 x 0.35 - 0.55 kg/m ²
	Top coat	1-2 x Sikafloor®-264	1-2 x 0.25 - 0.3 kg/m ² for each layer
Product Temperature	Please refer to the individual Product Data Sheet		
Ambient Air Temperature	+10 °C min. / +30 °C max.		
Relative Air Humidity	80 % r.h. max.		

Dew Point

Beware of condensation!

The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or blooming on the floor finish.

Substrate Temperature

+10 °C min. / +30 °C max.

Substrate Moisture Content

When performing application work with Sikafloor® MultiDur ES-14, the substrate moisture content must not exceed 4 % pbw measured by Tramex. Test method: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).

Waiting Time / Overcoating

Before applying Sikafloor®-264 on Sikafloor®-156/-161/-160 allow:

Substrate temperature	Minimum	Maximum
+10 °C	24 hours	3 days
+20 °C	12 hours	2 days
+30 °C	8 hours	1 day

Before applying Sikafloor®-264 on Sikafloor®-264 allow:

Substrate temperature	Minimum	Maximum
+10 °C	30 hours	3 days
+20 °C	24 hours	2 days
+30 °C	16 hours	1 day

Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.

Applied Product Ready for Use

Temperature	Foot traffic	Light traffic	Full cure
+10 °C	~ 72 hours	~ 6 days	~ 10 days
+20 °C	~ 24 hours	~ 4 days	~ 7 days
+30 °C	~ 18 hours	~ 2 days	~ 5 days

Note: Times are approximate and will be affected by changing ambient conditions.

PRODUCT INFORMATION**Packaging**

Please refer to the individual Product Data Sheet

Shelf life

Please refer to the individual Product Data Sheet

Storage conditions

Please refer to the individual Product Data Sheet

MAINTENANCE**CLEANING**

Please refer to the Method Statement Sikafloor®-Cleaning Regime

FURTHER DOCUMENTS

- Sika® Method Statement Mixing & Applications of Flooring systems
- Sika® Method Statement Evaluation and Preparation of Surfaces for Flooring systems

LIMITATIONS

- Do not apply Sikafloor® MultiDur ES-14 on substrates with rising moisture.
- Freshly applied Sikafloor® MultiDur ES-14 must be protected from damp, condensation and water for at least 24 hours.
- The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.

- For exact colour matching, ensure the Sikafloor®-264 in each area is applied from the same control batch numbers.

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control. All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, stor-

age and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Hellas ABEE
15 Protomagias Str.
14568 Kryoneri
Attica-Greece
Tel.: +30 210 8160 600
Fax: +30 210 8160 606
www.sika.gr | sika@gr.sika.com



SikafloorMultiDurES-14_en_GR_(09-2017)_2_1.pdf

System Data Sheet
Sikafloor® MultiDur ES-14
September 2017, Version 02.01
020811900000000005